



BUILDING AN ENERGY-EFFICIENT FUTURE

LIGHTING MANAGEMENT SYSTEM



#LegrandImprovingLives

 **legrand**[®]

ABOUT US

Legrand is the global specialist in electrical and digital building infrastructures. Our purpose is to improve life by transforming the spaces where people live, work and meet with electrical and digital infrastructures and connected solutions that are simple, innovative and sustainable. When you choose Legrand, you put our powerful worldwide presence and guaranteed global expertise to work for you. And you are sure to find the solutions you need among our innovative applications in new business segments. With Legrand, you have the advantage of single logistics and distribution channels ensuring optimum lead times and mass production capability



INDEX

SENSOR CATEGORIZATION	03-04
Suitable Applications & Mounting Guide	
SMALL, LARGE & MEDIUM SPACE	05-18
Meeting Room · Residential Space · Washroom · Corridor · Passage Ways · Office · Commercial Indoor	
OUTDOOR / SEMI-OUTDOOR	10-18
Staircase · Outdoor Walls · Ceiling Mounted Indoor/Outdoor	
HIGH CEILING AREAS	19-21
Industrial Area · Logistic Area · Warehouse	
INFRARED REMOTE	21
Remote Configuration & Control	

iStock™
Credit: onurdongel



SENSOR CATEGORIZATION

Suitable Applications & Mounting Guide

REFERENCE	MOUNTING	LOAD TYPE	IP RATING	APPLICATION AREAS												
				SMALL SPACE					LARGE & MEDIUM SPACE		OUTDOOR/ SEMI-OUTDOOR			HIGH CEILING AREAS		
				Meeting Room	Washroom	Residential Space	Corridor	Passage ways	Office	Commercial Indoor	Staircase	Outdoor Walls	Ceiling Mounted Indoor/Outdoor	Industrial Area	Logistic Area	Warehouse
048736	Surface	ON/OFF	IP20	✓	☐	✓	✓	✓	✓	☐	☐	☐	☐	☐	☐	☐
048737	Recessed	ON/OFF	IP20	✓	☐	✓	✓	✓	✓	☐	☐	☐	☐	☐	☐	☐
048738	Recessed	ON/OFF	IP20	✓	☐	✓	✓	✓	✓	☐	☐	☐	☐	☐	☐	☐
048806	Recessed	ON/OFF	IP20	✓	✓	☐	✓	✓	✓	✓	☐	☐	☐	☐	☐	☐
048450	Recessed	ON/OFF	IP41	✓	✓	✓	☐	☐	✓	✓	☐	☐	☐	☐	☐	☐
048451	Recessed	DALI	IP41	✓	✓	✓	✓	☐	✓	✓	✓	☐	☐	☐	☐	☐
048452	Surface	ON/OFF	IP40	✓	✓	✓	☐	☐	✓	✓	☐	☐	☐	☐	☐	☐
048458	Surface	ON/OFF	IP55	✓	✓	✓	✓	✓	✓	✓	✓	✓	☐	☐	☐	☐
048460	Surface	ON/OFF	IP55	☐	☐	☐	☐	☐	☐	☐	✓	✓	✓	☐	☐	☐
048462	Recessed	ON/OFF	IP20	✓	✓	✓	✓	✓	✓	✓	☐	☐	☐	☐	☐	☐
048463	Recessed	DALI	IP20	✓	☐	☐	☐	☐	✓	✓	☐	☐	☐	☐	☐	☐
048466	Recessed	ON/OFF	IP41	☐	☐	☐	✓	✓	☐	✓	☐	☐	☐	☐	☐	☐
048468	Surface	ON/OFF	IP40	☐	☐	☐	✓	✓	☐	✓	☐	☐	☐	☐	☐	☐
048470	Batten Mounted	ON/OFF	IP65	✓	☐	✓	✓	☐	✓	✓	✓	✓	✓	✓	☐	☐
048471	Recessed	ON/OFF	IP41	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	✓	✓	✓
048473	Surface	ON/OFF	IP55	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	✓	✓	✓

SMALL, LARGE & MEDIUM SPACE

(Meeting Room, Residential Space, Corridor, Passage Ways, Office)

PRODUCT CODE: 048736
MOTION SENSOR
PIR 360° - AUTO ON/OFF



Parameter	Information
Detection Technology	PIR (Passive Infrared) motion detection
Area of detection	360° coverage; approx. Ø 6 m at 3 m mounting height
Control options	Automatic ON/OFF based on presence + daylight threshold (dual control via time & lux settings)
Relay Output	Integrated relay output (mains switching L → L')
Load on output	Halogen: 2000 W (8.5 A), CFL: 1000 W (4.3 A), LED: 300 W (1.3 A)
Mounting Option	Surface mounting
Standard Mounting Height	Recommended 2.2 – 3 m (max ~3 m)
Configuration Option	Manual setting using potentiometers (time delay & lux adjustment)
Wiring Option terminal	Screw terminals; 2 × 1.5 mm ² wiring capacity
Adjustable Time Delay	10 seconds to 15 minutes (continuously adjustable)
Light Level Threshold	Approx. 3 – 300 lux adjustable
IP Rating	IP20
Zero Crossing	No (standard relay switching)

SMALL, LARGE & MEDIUM SPACE

(Meeting Room, Residential Space, Corridor, Passage Ways, Office)

PRODUCT CODE: 048737
MOTION SENSOR
PIR 360°



Parameter	Information
Detection Technology	PIR (Passive Infrared) motion detection
Area of detection	360° detection; approx. Ø 6 m at 3 m height
Control options	Automatic ON/OFF based on presence + daylight (lux control via potentiometer)
Relay Output	Relay output for lighting control (mains switching)
Load on output	Halogen: 1200 W (5.2 A), CFL: 300 W (1.3 A), LED: 300 W (1.3 A)
Mounting Option	Flush mounting (recessed installation)
Standard Mounting Height	Recommended up to 3 m (2.2–3 m typical)
Configuration Option	Manual adjustment via potentiometers (time delay & lux setting)
Wiring Option terminal	Screw terminals; 2 × 1.5 mm ² wiring
Adjustable Time Delay	10 seconds to 15 minutes
Light Level Threshold	Approx. 3 – 300 lux adjustable
IP Rating	IP20
Zero Crossing	No (standard relay switching)

SMALL, LARGE & MEDIUM SPACE

(Meeting Room, Residential Space, Corridor, Passage Ways, Office)

PRODUCT CODE: 048738
MOTION SENSOR
MICROWAVE PIR 360°



Parameter	Information
Detection Technology	Microwave (MW) motion detection
Area of detection	360° detection; approx. Ø 16 m at 3 m height
Control options	Automatic ON/OFF based on presence + daylight (lux control) + adjustable sensitivity
Relay Output	Relay output (mains switching, ON/OFF lighting control)
Load on output	Halogen: 1200 W (5.2 A), CFL: 300 W (1.3 A), LED: 300 W (1.3 A)
Mounting Option	Flush mounting (recessed ceiling)
Standard Mounting Height	Recommended 1.5–3 m (typical ~3 m)
Configuration Option	Manual adjustment via potentiometers (Sensitivity, Time, Lux)
Wiring Option terminal	Screw terminals; 2 × 1.5 mm ² wiring
Adjustable Time Delay	10 seconds to 12 minutes
Light Level Threshold	Approx. 3 – 300 lux adjustable
IP Rating	IP20
Zero Crossing	No (standard relay switching)

SMALL, LARGE & MEDIUM SPACE

(Meeting Room, Washroom, Corridor, Passage Ways, Office, Commercial Indoor)

PRODUCT CODE: 048806
DUAL TECH DETECTOR
SWITCH



Parameter	Information
Detection Technology	Dual technology: PIR (Passive Infrared) + Ultrasonic (US)
Area of detection	360° ceiling detection; up to ~150 m ² (depending on sensitivity & mounting height)
Control options	Auto ON / Auto OFF, Manual ON / Auto OFF, walkthrough mode, remote control via IR configurator
Relay Output	Normally open (NO) contact connected to phase
Load on output	Up to 2000 W (incandescent/halogen), supports fluorescent, LED loads (varies by type)
Mounting Option	Flush ceiling mounting
Standard Mounting Height	Typically 2.5 m to 6 m
Configuration Option	Infrared remote + mobile app (Legrand Close Up) configuration tools
Wiring Option terminal	Automatic terminals, 4 terminals; capacity: 2 × 2.5 mm ²
Adjustable Time Delay	0 sec to 59 min 59 sec (default 15 min)
Light Level Threshold	Adjustable 20–1275 lux (default 500 lux)
IP Rating	IP20
Zero Crossing	No (standard relay switching)

SMALL, LARGE & MEDIUM SPACE

(Meeting Room, Washroom, Residential Space, Office, Commercial Indoor)

PRODUCT CODE: 048450
GREEN-I - GI-SRW -
STANDARD RECESSED
ON/OFF PRESENCE SENSOR



Parameter	Information
Detection Technology	PIR (Passive Infrared / Infrared presence sensing)
Area of detection	360° detection; approx. 14 m diameter at 2.5 m mounting height
Control options	Auto ON/Auto OFF, Manual ON/Auto OFF (via push button), IR remote configuration
Relay Output	Normally Open (NO) relay output (phase switching)
Load on output	Resistive Halogen/Incandescent: 2000W, Led Load - 350VA($\cos\phi \approx 0.5$) & 1000VA($\cos\phi = 1$), CFL : Integrated Ballast - 1000VA & Separate Ballast - 500 VA
Mounting Option	Recessed ceiling mounting (false ceiling)
Standard Mounting Height	~2.5 m (recommended)
Configuration Option	Potentiometer (trimmers) + Infrared remote control
Wiring Option terminal	4 terminals; pluggable terminals; 2×1.5 mm ² or 1×2.5 mm ²
Standby Consumption	~0.1 W (no-load consumption)
Adjustable Time Delay	10 sec to 30 min (with pulse option)
Light Level Threshold	Adjustable from 5 to 2000 lux
IP Rating	IP41 (recessed version 048450)
Zero Crossing	Yes (relay switches loads at zero crossing)

SMALL, LARGE & MEDIUM SPACE, OUTDOOR/SEMI-OUTDOOR

(Meeting Room, Washroom, Residential Space, Corridor, Office, Commercial Indoor & Staircase)

PRODUCT CODE: 048451
GREEN-I - GI-SRW-D -
STANDARD RECESSED
DALI SENSOR



Parameter	Information
Detection Technology	Passive Infrared (PIR) presence detection / Infrared technology with pyroelectric sensor.
Area of detection	360° detection angle; up to 14 m diameter detection area at 2.5 m mounting height (tangential approach, medium sensitivity).
Control options	DALI lighting control, Presence-based ON/OFF, Lux-level control, Push-button override (auxiliary input), Auto ON/Auto OFF mode, Manual ON/Auto OFF mode, IR remote configuration.
Relay Output	No relay output; 1 DALI output for bus supply and lighting control.
Load on output	DALI bus current: 56 mA @ 16 V (guaranteed), 75 mA @ 16 V (maximum).
Mounting Option	Ceiling mounted
Standard Mounting Height	2.5 m (reference height used for coverage performance).
Configuration Option	Local trimmers (Time Delay & Lux) and Infrared Remote Control
Wiring Option terminal	3-pin + 2-pin pluggable terminal; terminal capacity: 2 × 1.5 mm ² or 1 × 2.5 mm ² ; stripping length 7 mm.
Standby Consumption	0.17 W.
Adjustable Time Delay	Adjustable from 10 seconds to 45 minutes.
Light Level Threshold	Adjustable from 5 lux to 2000 lux.
IP Rating	IP41
Zero Crossing	Yes (relay switches loads at zero crossing)

SMALL, LARGE & MEDIUM SPACE

(Meeting Room, Washroom, Residential Space, Office & Commercial Indoor)

PRODUCT CODE: 048452
GREEN-I - GI-SSW -
STANDARD SURFACE
ON/OFF PRESENCE SENSOR



Parameter	Information
Detection Technology	PIR (Passive Infrared / Infrared presence sensing)
Area of detection	360° detection; approx. 14 m diameter at 2.5 m mounting height
Control options	Auto ON/Auto OFF, Manual ON/Auto OFF (via push button), IR remote configuration
Relay Output	Normally Open (NO) relay output (phase switching)
Load on output	Resistive Halogen/Incandescent: 2000W, Led Load - 350VA(cosφ ≈ 0.5) & 1000VA(cosφ = 1) CFL : Integrated Ballast - 1000VA & Separate Ballast - 500 VA
Mounting Option	Surface ceiling mounting
Standard Mounting Height	~2.5 m (recommended)
Configuration Option	Potentiometer (trimmers) + Infrared remote control
Wiring Option terminal	4 terminals; pluggable terminals; 2×1.5 mm ² or 1×2.5 mm ²
Standby Consumption	~0.1 W (no-load consumption)
Adjustable Time Delay	10 sec to 30 min (with pulse option)
Light Level Threshold	Adjustable from 5 to 2000 lux
IP Rating	IP40
Zero Crossing	Yes (relay switches loads at zero crossing)

SMALL, LARGE & MEDIUM SPACE, OUTDOOR/SEMI-OUTDOOR

(Meeting Room, Washroom, Corridor, Passage Ways, Office, Commercial Indoor, Staircase & Outdoor walls)

PRODUCT CODE: 048458
GREEN-I - GI-ISW -
WALL IP55 ON
ON-OFF LIGHTING CONTROL SENSOR



Parameter	Information
Detection Technology	Passive Infrared (PIR) – pyroelectric sensor
Area of detection	140° detection angle; approx. 10 m × 14 m at 2.5 m height
Control options	Auto ON/Auto OFF, Manual ON/Auto OFF, Push button override, IR remote control, Test mode
Relay Output	1 relay output (normally open contact connected to phase)
Load on output	Up to ~1000 W (incandescent/halogen), LED & fluorescent loads supported (various combinations)
Mounting Option	Surface wall mounting
Standard Mounting Height	2.5 m
Configuration Option	Potentiometers (trimmers) + Infrared remote control
Wiring Option terminal	4 terminals; pluggable terminal; 2 × 1.5 mm ² or 1 × 2.5 mm ²
Standby Consumption	~0.1 W (no-load power consumption)
Adjustable Time Delay	10 seconds to 30 minutes (up to 60 min via remote)
Light Level Threshold	5 to 2000 lux adjustable
IP Rating	IP55
Zero Crossing	Yes (relay switches loads at zero crossing)

OUTDOOR/SEMI-OUTDOOR

(Staircase, Outdoor Walls & Ceiling Mounted Indoor/Outdoor)

PRODUCT CODE: 048460
GREEN-I - GI-IMW - IP55
ON-OFF LIGHTING CONTROL SENSOR



Parameter	Information
Detection Technology	Passive Infrared (PIR) – pyroelectric sensors
Area of detection	360° detection; approx. 8 m diameter at 2.5 m height
Control options	Auto ON/Auto OFF, Manual override via push button, IR remote control, Test mode
Relay Output	1 relay output (normally open contact connected to phase)
Load on output	Up to ~1000 W (lighting loads incl. LED, fluorescent, halogen, etc.)
Mounting Option	Surface ceiling mounting
Standard Mounting Height	2.5 m
Configuration Option	Potentiometers (trimmer) + Infrared remote control
Wiring Option terminal	4 terminals; pluggable terminal; 2 × 1.5 mm ² or 1 × 2.5 mm ²
Standby Consumption	~0.1 W (no-load power consumption)
Adjustable Time Delay	10 seconds to 30 minutes (extendable via remote)
Light Level Threshold	5 to 2000 lux adjustable
IP Rating	IP55
Zero Crossing	Yes (relay switches loads at zero crossing)

SMALL, LARGE & MEDIUM SPACE

(Meeting Room, Washroom, Residential Space, Corridor, Passage Ways, Office & Commercial Indoor)

PRODUCT CODE: 048462
GREEN-I - GI-MRW -
MINI RECESSED
ON-OFF LIGHTING CONTROL SENSOR



Parameter	Information
Detection Technology	PIR (Passive Infrared) – pyroelectric sensor
Area of detection	Approx. up to Ø 9–10 m at 2.5 m height (depends on movement & sensitivity)
Control options	Auto ON/OFF, Manual ON/Auto OFF via auxiliary switch, IR remote control configuration
Relay Output	Normally open contact (phase switching)
Load on output	Up to 2000 W (incandescent), LED loads up to ~240–350 VA, fluorescent & CFL supported
Mounting Option	Recessed (flush ceiling), surface ceiling, or luminaire side mounting
Standard Mounting Height	2.5 m (typical reference height)
Configuration Option	Potentiometer (trimmer) + Infrared remote control
Wiring Option terminal	Terminal capacity: 1.5 mm ² , supports auxiliary switch wiring
Standby Consumption	0.1 W (no-load consumption)
Adjustable Time Delay	10 sec to 30 min
Light Level Threshold	5 to 2000 lux adjustable
IP Rating	IP20
Zero Crossing	Yes (relay switches loads at zero crossing)

SMALL, LARGE & MEDIUM SPACE

(Meeting Room, Office & Commercial indoor)

PRODUCT CODE: 048463
GREEN-I - GI-MRW-D -
MINI RECESSED DALI
LIGHTING CONTROL SENSOR



Parameter	Information
Detection Technology	PIR (Passive Infrared – pyroelectric sensor)
Area of detection	Up to ~Ø 9 m (tangential) at 2.5 m height (varies with sensitivity)
Control options	Automatic ON/OFF, Manual ON via auxiliary switch, IR remote configuration
Relay Output	Normally open (NO) contact connected to phase
Load on output	DALI lighting control; up to 20 (guaranteed) / 30 (max) ballasts; 56 mA output typical
Mounting Option	Flush (recessed ceiling), surface ceiling, or luminaire-side mounting
Standard Mounting Height	2.5 m (typical reference height for performance)
Configuration Option	Trimmers (potentiometers) + IR remote control (Cat. No. 0 484 75)
Wiring Option terminal	Terminal capacity: 1.5 mm ² ; DALI bus up to 300 m depending on cable size
Standby Consumption	0.1 W (no-load consumption)
Adjustable Time Delay	10 sec to 45 min (via trimmer or remote)
Light Level Threshold	5 to 2000 lux adjustable
IP Rating	IP20
Zero Crossing	Yes (relay switches loads at zero crossing)

LARGE & MEDIUM SPACE

(Corridor, Passage Ways & Commercial Indoor)

PRODUCT CODE: 048466
GREEN-I - GI-CRW -CORRIDOR RECESSED
ON-OFF LIGHTING CONTROL SENSOR



Parameter	Information
Detection Technology	Passive Infrared (PIR)
Area of detection	Approx. 5 × 24 m corridor coverage
Control options	Auto ON / Auto OFF, Manual ON / Auto OFF, Push button override, IR remote configuration
Relay Output	1 relay output (normally open contact, phase switching)t
Load on output	LED (up to 1000 VA), Incandescent/Halogen (~1000 W), Fluorescent, CFL, Contactor loads supported
Mounting Option	Recessed ceiling mounting
Standard Mounting Height	~2.5 m (recommended for coverage performance)
Configuration Option	Potentiometer (trimmers) + Infrared remote control
Wiring Option terminal	4 terminals, pluggable, capacity: 2×1.5 mm ² or 1×2.5 mm ²
Standby Consumption	0.1 W
Adjustable Time Delay	10 seconds to 30 minutes (extendable via remote)
Light Level Threshold	5 to 2000 lux adjustable
IP Rating	IP41
Zero Crossing	Yes (relay switches loads at zero crossing)

LARGE & MEDIUM SPACE

(Corridor, Passage Ways & Commercial Indoor)

PRODUCT CODE: 048468
GREEN-I - GI-CSW -
CORRIDOR SURFACE
ON-OFF LIGHTING CONTROL SENSOR



Parameter	Information
Detection Technology	Passive Infrared (PIR)
Area of detection	Approx. 5 × 24 m corridor coverage
Control options	Auto ON/Auto OFF, Manual ON/Auto OFF, push button override, IR remote control
Relay Output	1 relay output, normally open contact (phase switching)
Load on output	LED (~350 VA), Incandescent/Halogen (~1000 W), Fluorescent, CFL, Contactor loads
Mounting Option	Surface ceiling mounting
Standard Mounting Height	~2.5 m recommended
Configuration Option	Potentiometer (trimmer) + Infrared remote control
Wiring Option terminal	4 terminals, pluggable; capacity: 2×1.5 mm ² or 1×2.5 mm ²
Standby Consumption	0.1 W
Adjustable Time Delay	10 sec to 30 min (extendable via remote)
Light Level Threshold	5 to 2000 lux
IP Rating	IP40
Zero Crossing	Yes (relay switches loads at zero crossing)

SMALL, LARGE & MEDIUM SPACE, OUTDOOR/ SEMI-OUTDOOR & HIGH CEILING AREAS

(Meeting Room, Residential Space, Corridor, Office, Commercial Indoor, Staircase, Outdoor Walls, Ceiling Mounted Indoor/Outdoor & Industrial Area)

PRODUCT CODE: 048470
GREEN-I - GI-BOW -
BATTEN MOUNT
ON/OFF SENSOR



Parameter	Information
Detection Technology	Passive Infrared (PIR) motion detection using pyroelectric sensor and infrared technology.
Area of detection	360° detection pattern, up to 9 m diameter detection area (tangential movement, medium sensitivity) at 2.5 m mounting height.
Control options	Auto ON/Auto OFF, Manual ON/Auto OFF, Lux-based switching, Pulse mode, Auxiliary push-button override, IR remote control configuration.
Relay Output	1 Normally Open (NO) relay output connected to phase for ON/OFF lighting control.
Load on output	Max relay rating 8.5 A. Supports LED loads up to 240 VA, incandescent/halogen loads up to 2000 W, fluorescent loads up to 10×(2×36 W), and contactors up to 2 A.
Mounting Option	Batten-mounted; designed for direct mounting on batten-style luminaires.
Standard Mounting Height	Recommended mounting height 2.8 m.
Configuration Option	Onboard potentiometers (Lux & Time settings) and IR Remote Control (Cat. No. 048475).
Wiring Option terminal	4-wire pluggable terminal (Black, Blue, Brown, Grey); terminal capacity 4 × 1 mm ² .
Standby Consumption	0.1 W (no-load power consumption).
Adjustable Time Delay	Adjustable from 10 seconds to 30 minutes; pulse mode available.
Light Level Threshold	Adjustable from 5 lux to 2000 lux.
IP Rating	IP65 (when mounted on an IP65 luminaire).
Zero Crossing	Yes - relay output switches loads at the zero crossing.

HIGH CEILING AREAS

(Industrial Area, Logistic Area, Warehouse)

PRODUCT CODE: 048471
GREEN-I - GI-HRW -
HIGHBAY RECESSED
ON-OFF LIGHTING CONTROL SENSOR



Parameter	Information
Detection Technology	Passive Infrared (PIR) / Infrared detection
Area of detection	360° coverage; approx. 26 m diameter at 10 m mounting height
Control options	Auto ON/OFF, Manual ON/Auto OFF, Auxiliary push-button override
Relay Output	Normally Open (NO) contact, phase switching
Load on output	Up to approx. 2000 W (resistive); supports LED, fluorescent, halogen, etc.
Mounting Option	Ceiling mounting – Recessed
Standard Mounting Height	Typically 10 m
Configuration Option	Trimmer (potentiometer) + Infrared remote control
Wiring Option terminal	4 terminals, pluggable; 2×1.5 mm ² or 1×2.5 mm ²
Standby Consumption	0.1 W (no-load power consumption)
Adjustable Time Delay	10 seconds to 30 minutes
Light Level Threshold	5 to 2000 lux
IP Rating	IP41
Zero Crossing	Yes (relay switches at zero crossing)

HIGH CEILING AREAS

(Industrial Area, Logistic Area, Warehouse)

PRODUCT CODE: 048473
GREEN-I - GI-HRW -
HIGHBAY SURFACE
ON-OFF LIGHTING CONTROL SENSOR




Parameter	Information
Detection Technology	Passive Infrared (PIR) / Infrared detection
Area of detection	360° coverage; approx. 26 m diameter at 10 m height
Control options	Auto ON/OFF, Manual ON/Auto OFF, push-button override (auxiliary input)
Relay Output	Normally Open (NO) contact; phase switching
Load on output	Up to 2000 W (resistive); supports LED, fluorescent, halogen loads
Mounting Option	Ceiling mounted – Surface mounting (0 484 73)
Standard Mounting Height	Typically 10 m
Configuration Option	Trimmer (potentiometer) + Infrared remote control
Wiring Option terminal	4 terminals, pluggable; 2×1.5 mm ² or 1×2.5 mm ²
Standby Consumption	0.1 W (no-load power consumption)
Adjustable Time Delay	10 seconds to 30 minutes
Light Level Threshold	5 to 2000 lux
IP Rating	IP55 (surface-mounted version)
Zero Crossing	Yes (relay switches loads at zero crossing)

PRODUCT CODE: 048475
GREEN-I - GI-REM - INFRARED



Parameter	Information
Load Control Functions	ON/OFF switching of connected loads Enable/disable motion indicator LED
Operating Modes	Auto ON / Auto OFF (fully automatic operation), Manual ON / Auto OFF (manual switch ON, automatic OFF after delay)
Light Level (Lux) Adjustment	Adjustable in ± 50 lux steps, Maximum setting up to 2000 lux, Read-back function via LED indication
Time Delay Settings	Adjustable in ± 1 minute steps, Maximum delay up to 60 minutes & Read-back function using LED indication
Pulse Function	Activates timer-based switching (short pulse operation)
Sensitivity Adjustment	3 levels: Low / Medium / High

This image shows a blank sheet of white paper with ten horizontal dashed lines. The lines are evenly spaced and run across the width of the page, providing a guide for handwriting practice. There is no text or other markings on the paper.

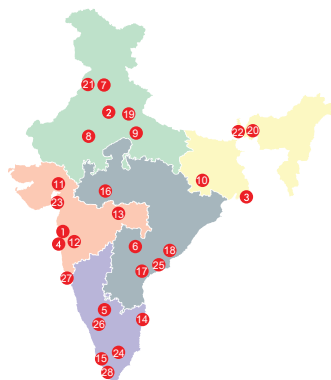

Head offices

- 61 & 62, 6th Floor,
Kalpataru Square, Kondivita Road,
Off Andheri-Kurla Road, Andheri (E),
MUMBAI – 400 059.
Tel : [022] 3041 6200
Fax : [022] 3041 6201
Website : www.legrand.co.in

Regional sales offices

- B-225, 4th Floor, Okhla Industrial Area, Phase -1,
NEW DELHI - 110020.
Tel : [011] 3990 2200, 2699 0046,
[011] 2699 0028 / 29 / 30 / 31
Fax : [011] 2699 0047 **INNOVAL**
- Unit no 1203, Ambuja Eco Centre,
Sector 5, Salt Lake,
KOLKATA – 700 091. **INNOVAL**
- C/203, Corporate Avenue, Atul Projects,
Near Mirador Hotel, Chakala,
Andheri - Ghatkopar Link Road,
Andheri - East, **MUMBAI** – 400 099.
Tel : [022] 6230 1000 **INNOVAL**

- Ferozes Manor, Situated at 58
Hospital Road, Shivaji Nagar,
BANGALORE – 560 001.
Tel : [080] 6822 0000 **INNOVAL**

- Prestige Phoenix, 1st Floor,
Next to Lifestyle Building,
Begumpet,
HYDERABAD – 500 016. **INNOVAL**

Branch offices

- Unit No. 203, Tower B Bestech
Business Towers, Sector-66, Mohali,
CHANDIGARH -160017.
Telefax : [0172] 5019 008 **INNOVAL**
- Building No-128, Mansarovar Link Road,
Gopalpura Bypass, Mohan Nagar,
Near Ridhi Sidhi Flyover,
JAIPUR - 302 018.
Tel : 0141-2208 665 **INNOVAL**
- 209-A, 2nd Floor, Cyber Heights,
Opp. Indira Gandhi Pratishthan,
Vibhuti Khand, Gomti Nagar
LUCKNOW- 226 010.
Tel : [0522] 431 9316 **INNOVAL**
- 202 & 203, Sunrise, Forum 100,
Burdwan Compound, Lalpur,
RANCHI - 834 001.
Tel : [651] 660 5400
- A 101-102, Mondeal Heights,
Besides Novotel Hotel, Sarkhej
Gandhinagar Highway (S G Highway),
AHMEDABAD – 380 015.
Tel : [079] 6134 0555 **INNOVAL**
- 8th Floor, Pinnacle Park Avenue,
Opp. Law College, Law College Road
Next To German Bakery,
Shivaji Nagar, **PUNE** – 411 004.
Tel : [020] 6729 5601 / 600 **INNOVAL**

- Plot No.95, 2nd Floor, Shreyash
Heights, VIP Road, Ramdaspath,
NAGPUR – 440 010.
Tel : [0712] 2440 900

- 10 B, Prestige Center Court, Office Block,
Vijaya Forum Mall, #183, N.S.K. Salai,
Vadapalani, **CHENNAI** – 600 026.
Tel : [044] 6612 2800 **INNOVAL**

- J. B. Manjooran Estate,
Door No 50/1107 A9, 3rd Floor,
Bye Pass Junction, Edappally,
COCHIN – 682 024.
Tel : [0484] 6604 700 **INNOVAL**

- 204-205, Megapolis Square,
579, M G Road,
INDORE – 452 001.
Tel : [0731] 4999 891

- MF-2, Datta's Lords House,
Jammie Chettu Street, Mogalrajapuram,
VIJAYAWADA – 520 010.
Tel : [0866] 248 2393/6393

- Plot No. 359, Saheed Nagar,
2nd Floor,
BHUBANESWAR – 751 007.
Tel : [0674] 254 0623

- Unit - 1 & 2, Vijay Park,
Main Chakrata Road,
DEHRADUN- 248 001.
Uttarakhand.
Tel : [0135] 661 6100 **INNOVAL**

- House No. 97, Ground Floor,
Rajgarh Main Road,
Opp. City Heart Nursing Home,
GUWAHATI – 781 007.

Area offices

- Cabin No. 9, 2nd Floor,
Madhok Trade Centre,
Madhok Complex, Ferozpur Road,
LUDHIANA – 141 001.
Tel : [0161] 277 0301
- 94, Udhham Singh Sarani,
Ground Floor, Ashrampara,
SILIGURI – 734 001.
Tel : [0353] 264 1067
- A-207, Universal Business
Center, Near Madhuvan circle,
L.P. Savani Road, Adajan,
SURAT - 395 009.
Tel.: [0261] 263 3861 **INNOVAL**
- Aparna Towers, 1st Floor, 2/3,
Bypass Road,
MADURAI – 625 010.
Telefax : [0452] 230 8414
- 43-9-205, 3rd Floor, Plot No. 10,
Subbalakshmi Nagar,
Opp. More Super Market,
VISHAKAPATHANAM - 530 016.
Tel.: [0891] 273 5652 / 2739363 **INNOVAL**
- B-5, 1st Floor, Thirumalai Towers,
723, Avanashi Road,
COIMBATORE– 641 018.
Tel.: [0422] 668 3200 **INNOVAL**
- 515 & 516, Gera Imperium Grand,
Patto centre, Panaji
GOA – 403 001. **INNOVAL**
- 1st Floor, Cordial Bharathi,
Nanthancodu,
THIRUVANANTHAPURAM,
KERALA- 695 003 **INNOVAL**

Technical assistance from Legrand

Telephonic technical assistance for selection of products, technical information, guidance, wiring diagrams and estimation is now made available to you at each Regional Office. Contact the Technical Officer of Legrand at the following telephone numbers

New Delhi : Tel.: [011] 2699 0028, 3990 2200
Kolkata : Tel.: [033] 4021 3535 / 36
Mumbai : Tel.: [022] 6230 1000
Bangalore : Tel.: [080] 6822 0000
Hyderabad : Tel.: [040] 4567 1717

For other places, contact the nearest Regional / Branch / Area offices

customer.care@legrand.co.in

legrand®
LIVE THE ADVANTAGE